

# Sensor tester CO


In today's world, safety is essential. Our Tester is an innovative solution for monitoring the condition of carbon monoxide (CO) and tobacco smoke detectors based on gas detection (CO/VOC), ensuring reliability and ease of use. Thanks to its fast testing process and multiple-use capability, it is the perfect tool for professionals as well as individuals who care about their safety.

**Product features:**

- ✓ fast operation,
- ✓ easy to use,
- ✓ leaves no residue and does not contaminate detectors,
- ✓ allows up to 7 tests,
- ✓ 360° valve for easy application.

**Applications:**

- ✓ checking carbon monoxide (CO) detectors,
- ✓ testing tobacco smoke detectors based on gas detection (CO/VOC).

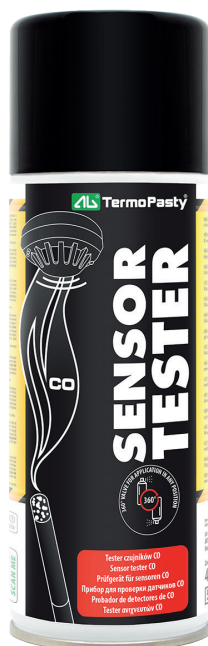

Physicochemical properties	
Appearance	Transparent gas
Odor	Undefined
Filling pressure at 15°C	200.0 bar-g
Filling pressure at 15°C	203.943 kg/cm <sup>2</sup>
Content at 0°C, 1013 mbar	8.921 Nm <sup>3</sup>
Operating temperature range	-10°C to 50°C
Shelf life	3 years

**Compatibility:**

The Sensor Tester CO is compatible with most carbon monoxide detectors and tobacco smoke detectors based on gas detection (CO/VOC). Its neutral formula does not negatively affect the operation of the devices and does not leave any residue on the sensors, ensuring their long-term functionality.

Application method	
Aerosol with tube	Yes

**Usage instructions:**

**Read safety data sheet carefully prior to use.**

No additional equipment is required to perform the test.

**✔ Testing CO detectors:**

Place the detector in a ziplock bag, leaving a small opening for the capillary tube.  
 Insert the tube through the opening and spray the product for 3 seconds.  
 Seal the bag tightly.  
 The alarm signal should appear within 3 minutes.  
 If the alarm does not activate, repeat the test after 15 minutes.  
 Lack of reaction indicates that the detector needs to be replaced.

**✔ Testing tobacco smoke detectors based on gas detection (CO/VOC):**

Point the tube towards the detector chamber from a distance of 3–5 cm.  
 Spray the product for 1 second.  
 The alarm signal should appear within a few seconds.

**Sensor checks should be carried out every 6 months.**

Package	
Aerosol	400 ml (ART.AGT-212) - 12 pcs.*

\*Quantity of pcs. in a bulk package.

**Storage:**

Protect from sunlight. Store in a well-ventilated place. Storage and use temperature: -10°C to 50°C; heating may cause an explosion.

**Technical support:**

AG TermoPasty provides technical support, answering questions about the technical specifications and applications of our products. Please contact us via email at [info@termopasty.pl](mailto:info@termopasty.pl).

**Note:**

The data presented in this document reflect our current state of knowledge and describe the typical properties and applications of the product. However, the responsibility for determining the suitability of this product for specific applications lies with the user. AG TermoPasty is not liable for the results of the product's use, as the conditions of its application are beyond our control.

